



Bage 60-LA00-LED

Type: Suspension/Pendant

Matériaux/Materials: Aluminium powder coat

Specifications: Bande LED Stripe • Driver 60W24VDC

Poids/Weight: 7 lb.

Garantie/Warranty: 2 ans/years

Certification:  US


Usage intérieur seulement/Indoor use only

Lien 3D/link: [Cliquez ici/Click here](#)


Select colors & finishes - Click here >

Pour tous les fichiers 3D, incluant CAD, Revit et IES, visitez le www.luminaireauthentik.com

For 3D drawings of all products, including CAD, Revit and IES files, please visit www.luminaireauthentik.com

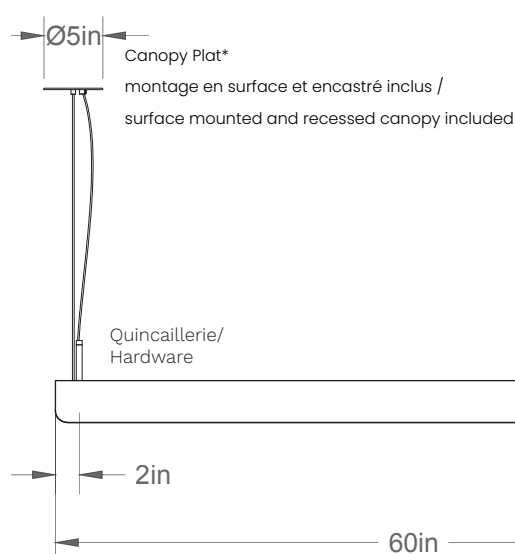

Avant/Front

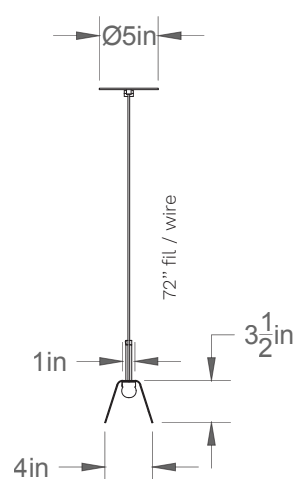

Côté/Side

Choisir la couleur de l'abat-jour / Choose shade colour

 Blanc Lustré Glossy White WTL	 Blanc Cassé Mat Matt Off-White OWM	 Vieux Rose Mat Matt Nude NDM	 Nutmeg Lustré Glossy Nutmeg NGL	 Vert Supérieur Lustré Glossy Superior Green SGL	 Meringue Mat Matt Meringue MEM	 Bleu Sarcelle Mat Matt Teal Blue TLM	 Or Mat Matt Gold ORM
 Blanc Mat Matt White WTM	 Crème Lustré Glossy Cream CRL	 Pêche Mat Matt Peach PHM	 Canyon Lustré Glossy Canyon CYL	 Lagoon Lustré Glossy Lagoon LGL	 Vieux Jaune Lustré Glossy Antique AYL	 Vert Menthe Mat Matt Mint Green MGM	 Bronze Mat Matt Bronze BZM
 Glacier Lustré Glossy Iceberg WGL	 Beige Mat Matt Beige BGM	 Sahara Lustré Glossy Sahara RHL	 Terracotta Lustré Glossy Terracotta TCT	 Gris Lustré Glossy Grey GYL	 Champs de Blé Lustré Glossy Wheatland WHL	 Yesterday Green Yesterday Green GYM	 Ardoise Mat Matt Slate SLM
 Lin Mat Matt Linen LIM	 Sable Mat Matt Sand SAM	 Porcelaine Mat Matt Porcelain POM	 Rouge Terreux Lustré Glossy Clay Red RCT	 Pigeon Bleu Lustré Glossy Blue Pigeon PBL	 Tournesol Lustré Glossy Sunflower SNL	 Cactus Lustré Glossy Cactus CTL	 Charcoal Mat Matt Charcoal CHM
 Galet Mat Matt Pebble GLM	 Café Lustré Glossy Cafe CFL	 Lavande Lustré Glossy Lavander LVL	 Rouge Lustré Glossy Red REL	 Bleu Saphire Lustré Glossy Saphire Blue BSL	 Jaune Lustré Glossy Yellow YLL	 Vert Classique Lustré Glossy Classic Green VCL	 Noir Mat Matt Black BKM

Choisir la couleur du fil (6' de base et +) / Choose wire colour (6' standard and +)

 Blanc White TWT	 Crème Cream TCR	 Café Cafe TCF	 Nude Nude TND	 Sésame Sesame TSE	 Truffe Truffle TTF	 Cuivre Copper TCP	 Or Gold TOR
 Vert Foncé Dark Green TCT	 Gris Pâle Light Grey TWG	 Charcoal Charcoal TCH	 Noir Black TBK				

Choisir la couleur de canopy / Choose canopy colour

 Blanc Mat Matt White WTM	 Noir Mat Matt Black BKM	 Même que abat-jour Same as shade
---	--	--

Choisir la couleur de la quincaillerie / Choose hardware colour



Laiton
Brass
BRR



Nickel
Nickel
NIR



Même couleur que abat-jour
Same as colour shade

Choisir la couleur de quincaillerie de suspension / Choose suspension hardware colour



Laiton
Brass
BRR



Nickel Satin
Satin Nickel
NIR

Choisir la couleur de câble de suspension / Choose suspension cable colour



Acier
Stainless Steel
CST



Noir
Black
CBK

Choisir la couleur de crochet / Choose hook colour



Laiton
Brass
BRR



Nickel Satin
Satin Nickel
NIR



Noir Mat
Matt Black
BKM



Blanc Mat
Matt White
WTM

Choisir les options de la bande LED / Choose LED Strip options



460 L - 6W - 3000K DIMMABLE
(460L/6W/30K/DIM)



610 L - 6W - 27K TO 35K DIMMABLE
(610L/6W/27K-35K/D-W)

1 Product introduction




- Dimming:Triac/ELV/MLV
- ULlisted,Class2,TypeHL
- Damp and drylocation
- Dimming0-100%
- 120Vacinput
- Built in active PFC, typical power factor=0.98
- THD<20%@120V Max. load
- Constant voltage type
- Small size: 2.83x1.53x0.89 inch (L*W*H)
- Super low loading request, works perfect at 20-100% load.
- Short-circuit, over-load protection.
- aluminum housing, for dry,damp.
- Compatible with popular dimmers in the market,Lutron-CL, Diva series and so on.

2 Specification


Model Number	PSCDS-96W-24V
Output Type	
Rated Power	96W
Rated Voltage	24V
Rated Current	4A
Voltage Tolerance	± 0.5V
Voltage Regulation	± 0.5%
Load Regulation	± 1%
Input Type	
Voltage Range	120V
Frequency Range	47-63HZ
Efficiency (Typ.)	88%@120VAC

Total Harmonic Distortion	THD< 20%(@100% load)
Power Factor(typ.)	0.98@120VAC
AC Current (Typ.)	0.92A
Inrush Current(Typ.)	-
Leakage Current	<0.5mA/ 120VAC
PROTECTION	
Short Circuit	Hiccup mode, recovers automatically after fault condition is removed.
Over Load	Reduce the output voltage and output power, auto-recovery or re-power on to recovery
ENVIRONMENT	
Working Temp.	Tcase=-40 ~ +60 (Please refer to“OUTPUTLOAD vs TEMPERATURE ” section)
Working humidity	20 ~ 95% RH non-condensing
Storage temp., Humidity	-40 ~ +90, 10 ~ 95% RH
Temp .coefficient	±0.03 %/ °C (0~ 50 °C)
Vibration	10~500Hz, 5G 10min./1 cycle,period for 60min. each along X,Y,Z axes
SAFETY & EMC	
Safety standards	UL8750, Class 2
Safety standards	I/P-O/P:1.88 KVAC
OTHERS	
Dimension	2.83x1.53x0.89 inch (L*W*H)
Packing	-


3 Mechanical Diagram

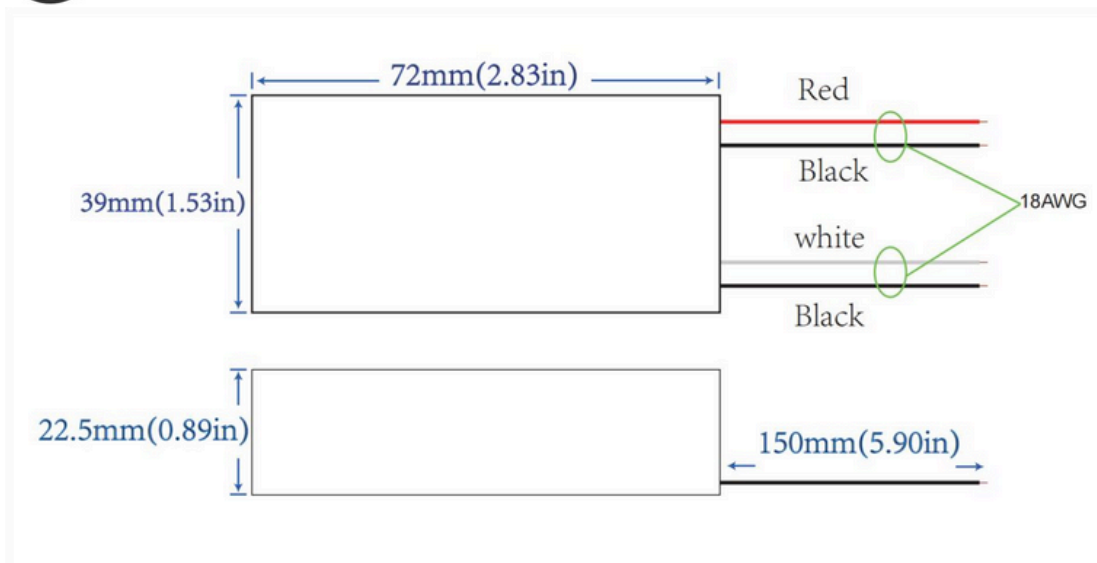

4 Wiring Diagram

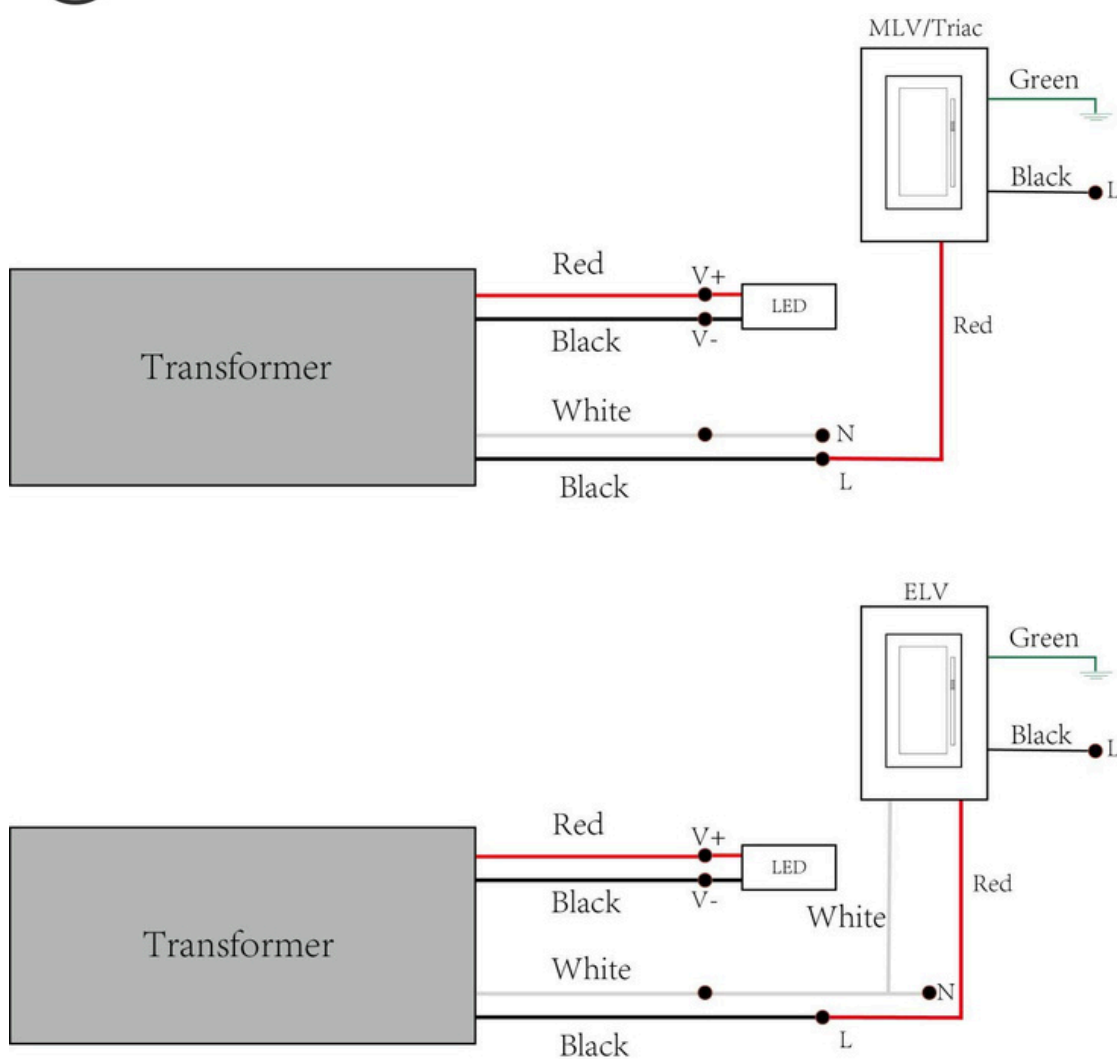

5 Load vs Ambient Temperature

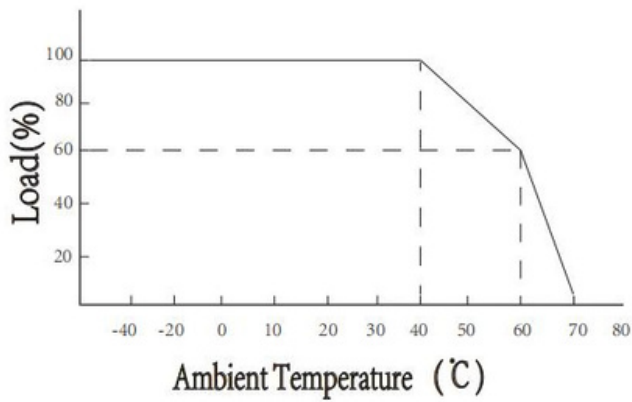

Instruction

This driver should be installed by qualified and professional person; Please make sure the driver is installed with adequate ventilation around it to allow for heat dissipation. Ensure that wiring is correct before test in order to avoid light and power supply damage; If the dimmable LED drivers do not work normally, contact us by email: info@axentled.com

Dimmer recommendation dimmer list 2024-03

Brand	Model number (Dimmer)	input voltage	Compatibility	Dimming range	Forward Phase or Reserve phase	Model be tested
LUTRON	SELV-300P	120V	OK	10-100%	Reserve phase	SET series transformer
	DVCL-253P	120V	OK	10-100%	Forward Phase	
	SCL-153P	120V	OK	0-100%	Forward Phase	
	DVCL-153P	120V	OK	0-100%	Forward Phase	
	CTCL-153P	120V	OK	0-100%	Forward Phase	
	TGCL-153P	120V	OK	10-100%	Forward Phase	
	PD-10NXD	120V	OK	10-100%	Forward Phase	
	PD-5NE	120V	OK	13-100%	Forward Phase	
	RRD-6NA	120V	OK	15-100%	Forward Phase/ Reserve phase	
	RRA-6NA	120V	OK	15-100%	Forward Phase/ Reserve phase	
	DVELV-303P	120V	OK	10-100%	Reserve phase	